



# VZ-S1055E

## H.265 1 HDD 5ch NVR



**SILVER  
SERIES**

### KEY FEATURES

#### HD Input

- S+265/H.265/H.264 video formats
- Connectable to the third-party network cameras
- Support live view, storage, and playback of the connected camera at up to 6MP resolution

#### HD Output

- HDMI and VGA simultaneous output
- HDMI Video output at up to 4K (3840x2160) resolution

#### HD Storage

- 1 SATA interface, up to 8TB for 1 HDD
- S+265 compression effectively reduces the storage space and costs by up to 75%

#### HD Transmission

- 1×RJ45 self-adaptive 10/100 Mbps network interface


#### Various Applications

- Centralized management of IP cameras, including configuration, information import/export, real-time information display, upgrade, etc.
- Connectable to smart IP cameras from VIZITRON and the recording, playing back, and backing up of VCA alarms can be realized
- VCA detection alarm is supported
- Web6 supports plug-in free browsing and can preview videos on all browsers
- Support cloud upgrade


## SPECIFICATIONS

Input	
Video Input	-5ch
Max Resolution	6MP
Two-way Audio Input	N/A
Bandwidth	Income 50Mbps; Outgoing 40Mbps
Output	
HDMI/VGA Output	HDMI -1ch, 3840x800x1280, 900x1440, 768x1366, 768x1024, 720x1280, 1080x1920, 2160 VGA -1ch, 800x1280, 900x1440, 768x1366, 768x1024, 720x1280, 1080x1920
Screen Split	1/3/4/5
Audio Output	N/A
Decoding	
Decoding Format	S265+/H.265/H.264
Recording Resolution	6MP/5MP/4MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Preview Capability	1x6MP, 1x5MP, 1x4MP, 1x3MP, 4x1080P, 5x720P, 5x4CIF
Synchronous Playback	1x6MP, 1x5MP, 1x4MP, 1x3MP, 3x1080P, 4x720P
Records Encryption	Yes
Hard Disk	
SATA	1 SATA interface for 1 HDDs
Capacity	Up to 8TB for each HDD
eSATA Interface	N/A
Array Type	N/A
External Interface	
Network Interface	1xRJ45 self-adaptive 100/10 Mbps network interface
USB Interface	2xUSB 2.0
Serial Interface	N/A
Alarm In/Out	N/A
Network	
Protocol	TCP/IP, ICMP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, UPnP, IGMP, QoS, IPV4, IPV6, Multicast, ARP, UDP, Telnet, RTMP
System Compatibility	ONVIF (PROFILE S/T), SDK, P2P
General	
Web Version	Web6
Language	Traditional Chinese, English
Operating Conditions	-10°C ~ 55°C, %90~%10 RH
Power Supply	DC12V 1.5A
Consumption (without HDD)	≤10W (without HDD)
Chassis	1U
Dimensions	199.5x200x42.9mm, (7.85x7.87x1.69 inch)
Weight (without HDD)	0.4Kg (0.88lb)

**DIMENSIONS (Unit: mm)**

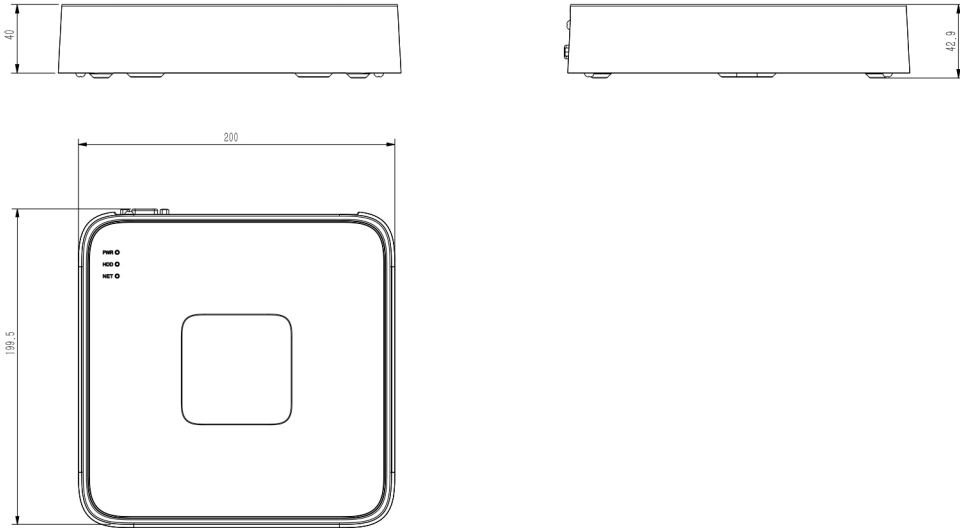

**Physical Interfaces**

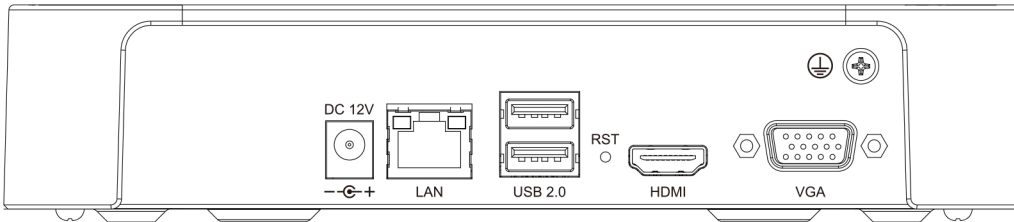

**36** Months Guarantee  
SUPPORTED BY  
**REDKA**  
Safe Hands of Technology  
www.redka.ir



Email: info@redka.ir  
Website: redka.ir

Tel: +98 21 88902790  
Fax: +98 21 88902790 (104)