



VZ-S4408-4K

H.265 4HDD 40ch NVR



**SILVER
SERIES**

KEY FEATURES

HD Input

- 5+265/H.265/H.264 video formats
- Connectable to the third-party network cameras
- Up to 40-channel input
- Supports live view, storage, and playback of the connected camera at up to 2 resolution

HD Output

- H and simultaneous output
- H video output at up to 4 40 2 60 resolution

HD Storage

- 4 S interfaces, up to 0 for each H
- 5+265 compression effectively reduces the storage space and costs by up to 5

HD Transmission

- 2 45 self-adaptive 0/ 00/ 000 bps network interfaces


Various Applications

- Centralized management of cameras, including configuration, information import/export, real-time information display, upgrade, etc.
- Connectable to smart cameras from and the recording, playing back, and backing up of C alarms can be realized
- C detection alarm is supported
- Smart search for the selected area in the video and smart playback to improve the playback efficiency
- eb6 supports plug-in free browsing and can preview videos on all browsers
- Support cloud upgrade


SPECIFICATIONS

Input	
Video Input	40-ch
Max Resolution	12MP
Two-way Audio Input	1-ch, 3.5mm
Bandwidth	Income 200Mbps; Outgoing 200Mbps
Output	
HDMI/VGA Output	HDMI 1-ch, 3840x2160, 2560x1600, 2560x1440, 1920x1080, 1280x720, 800x600, 1024x768, 1366x768, 1440x900, 1280x800 VGA 1-ch, 1920x1080, 1280x720, 800x600, 1024x768, 1366x768, 1440x900, 1280x800
Screen Split	1/3/4/6/8/9/10/13/16/20/25/36/40/64
Audio Output	1xRCA
Decoding	
Decoding Format	5+265/H.265/H.264
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF 3x12MP, 4x8MP,
Preview Capability	4x6MP, SxSMP, 8x4MP, 9x3MP, 16x1080P, 32x720P, 40x4CIF
Synchronous Playback	3x12MP, 4x8MP, 4x6MP, SxSMP, 8x4MP, 9x3MP, 16x1080P, 16x720P
Records Encryption	Yes
Hard Disk	
SATA	4 SATA interfaces for 4 HDDs
Capacity	Up to 10TB for each HDD
eSATA Interface	N/A
Array Type	JBOD, RAID0/1/5/6/10
External Interface	
Network Interface	2xRJ45 self-adaptive 10/100/1000 Mbps network interfaces
USB Interface	1xUSB 2.0, 1 xUSB 3.0
Serial Interface	N/A
Alarm In/Out	N/A
Network	
Protocol	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, IGMP, QoS, IPv4, IPv6, Multicast, ARP, UDP, SNMP, SSL, Telnet, RTMP, NFS
System Compatibility	ONVIF (PROFILE S/T/G), SDK, P2P
General	
Web Version	Web6
Language	English, Traditional Chinese, Russian, Spanish, Korean, Italian, Turkish, Simple Chinese, Thai, French, Polish, Dutch, Hebraism (UI), Arabic, Vietnamese
Operating Conditions	-H°C ~ 55°, 10%~90% RH
Power Supply	DC12V SA
Consumption (without HDD)	-s25W (without HDD)
Chassis	1.SU
Dimensions	75x347x440mm, (2.95x13.66x17.32 inch)
Weight (without HDD)	3.35Kg (7.381b)

DIMENSIONS (Unit: mm)

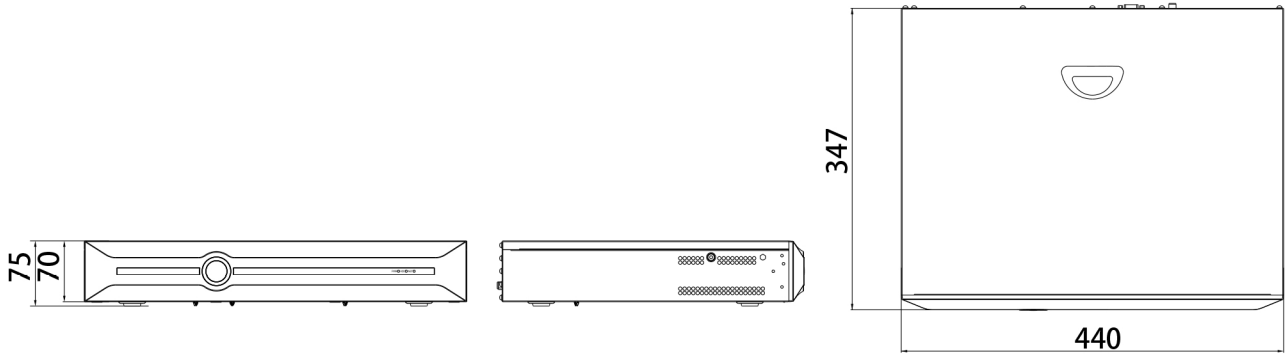

Physical Interfaces

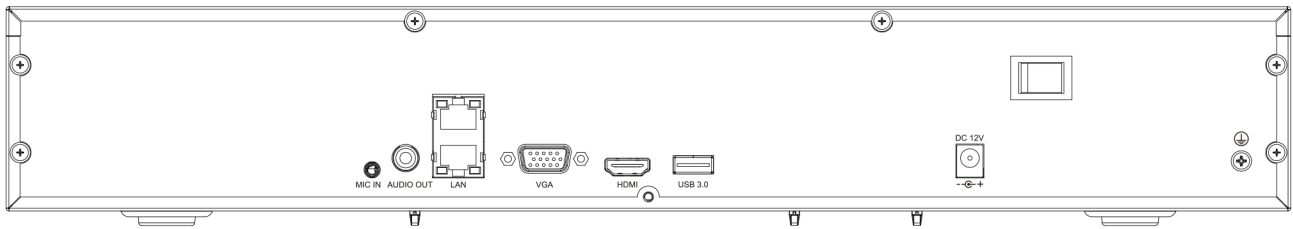

36 Months Guarantee
SUPPORTED BY
REDKA
Safe Hands of Technology
www.redka.ir



Email: info@redka.ir
Website: redka.ir

Tel: +98 21 88902790
Fax: +98 21 88902790 (104)